


KUMO CP2

KUMO CP2 is a 2RU control panel that can be used in standalone or networked configurations suitable for all KUMO routers including the KUMO 6464. Connecting via Ethernet to the same network as KUMO routers, KUMO CP2 enables full control from any location without the need for a computer. Up to four KUMO routers can be controlled from a single control panel. Supports ganged dual and quad port routing, allowing users to group together multiple inputs and outputs for Dual Link, 4K and Ultra HD workflows. In addition to HD and SD, every KUMO can route 2 or 4 grouped 3G-SDI connections, supporting uncompressed or RAW 4K and UltraHD signals.

<https://www.aja.com/products/kumo-cp2>

\$1209 US MSRP

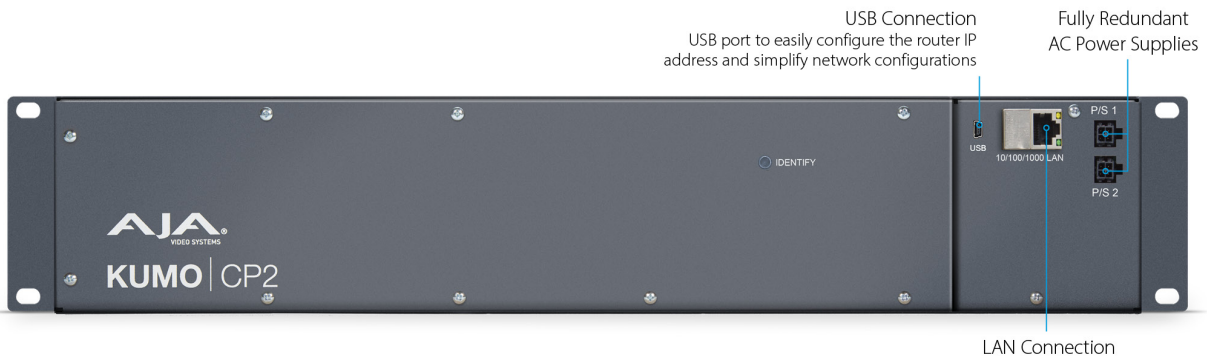

User Interface

- 80 buttons with removable overcap for lens chips
- Includes factory installed lens chip set

- High and Low button tally indication, configurable brightness
- Controls up to four KUMO routers
- Panel Lock feature
- Destination Lock feature

Router Support

- KUMO 1604
- KUMO 1616
- KUMO 3232
- KUMO 6464
- KUMO 1616-12G
- KUMO 3232-12G
- KUMO 6464-12G

Salvo

- 8 Salvos buttons can be enabled to trigger a KUMO router's configured salvos.

Network Interface

- 1x RJ-45, 10/100/1000 Ethernet
- Embedded web server for remote control

USB Interface

- 1x Mini-USB for IP configuration using AJA eMini-Setup

Size (w x d x h)

- 2RU - 17.4" x 1.3" x 3.5" (441.96 x 33.02 x 88.9 mm)

Weight

- 2.1 lb (1.0 kg)

Power

- External power supply required
 - Enclosure: Dual, redundant, 10-14VDC regulated, 4-pin Molex, 4W typical, 9.6W max.
 - AC adapter, included: 100-240VAC, 50/60 Hz, universal input, 60W
 - Optional redundant AC adapter sold separately, KUMO-PWR

Environment

- Safe Operating Temperature: 0 to 40 degrees C (32 to 104 degrees F)
- Safe Storage Temperature (Power OFF): -40 to 60 degrees C (-40 to 140 degrees F)
- Operating Relative Humidity: 10-90% noncondensing
- Operating Altitude: <3,000 meters (<10,000 feet)