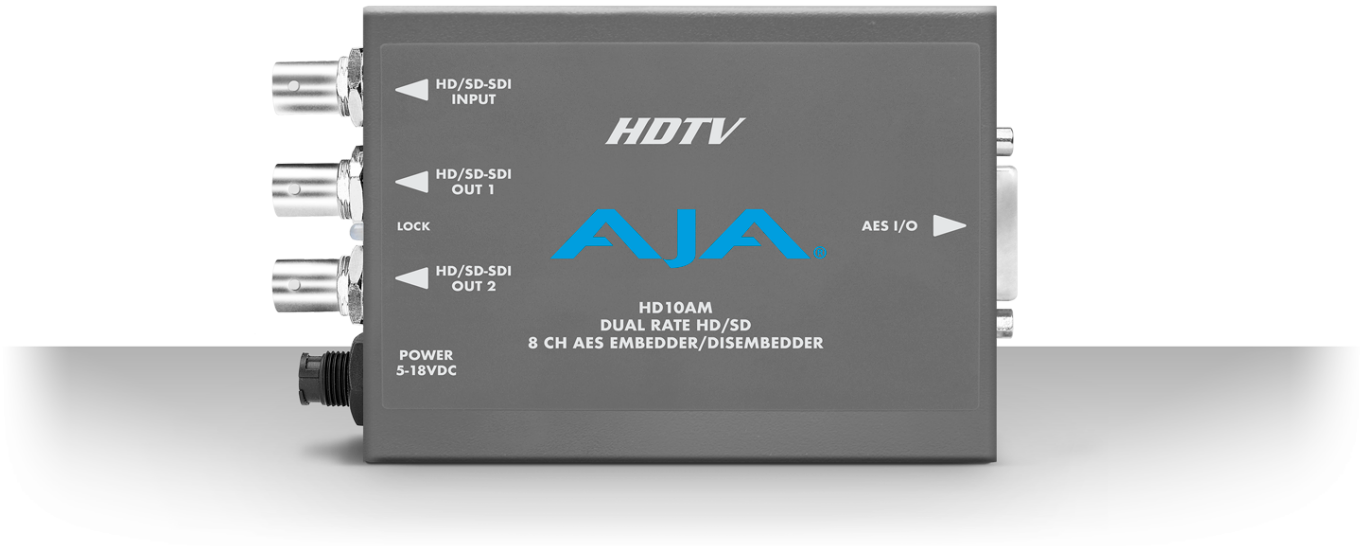

HD10AM

HD10AM is no longer available. For more information about AJA Mini-Converter products please visit the Mini-Converters page.

$ US MSRP

https://www.aja.com/index.php/products/hd10am

Formats

- HD SMPTE 292/296M
- SD SMPTE 259M

(Automatic Configuration)

Video Inputs

- HD-SDI or SDI BNC

Video Outputs

- Follows input, 2 x BNC

Audio Inputs

- 4 x AES 110 ohm XLR

Audio Outputs

- 4 x AES 110 ohm XLR

AES Audio

- SMPTE 272M/299M, 48 kHz synchronous

User Controls

- External dipswitch
- Embedder on/off, Ch pairs 1/2 - 7/8
- Input group select 1/2, 3/4
- Output group Select 1/2, 3/4
- SRC bypass

Size (w x d x h)

- 5.8" x 3.1" x 1.0" (147mm x 79mm x 25mm)

Power

- +5-18VDC, 5 watts. power supply required, included with purchase

Environment

- Safe Operating Temperature: 0 to 40 degrees C (32 to 104 degrees F)
- Safe Storage Temperature (Power OFF): -40 to 60 degrees C (-40 to 140 degrees F)
- Operating Relative Humidity: 10-90% noncondensing
- Operating Altitude: <3,000 meters (<10,000 feet)