


## Supermicro SYS-7049GP-TRT / X11DPG

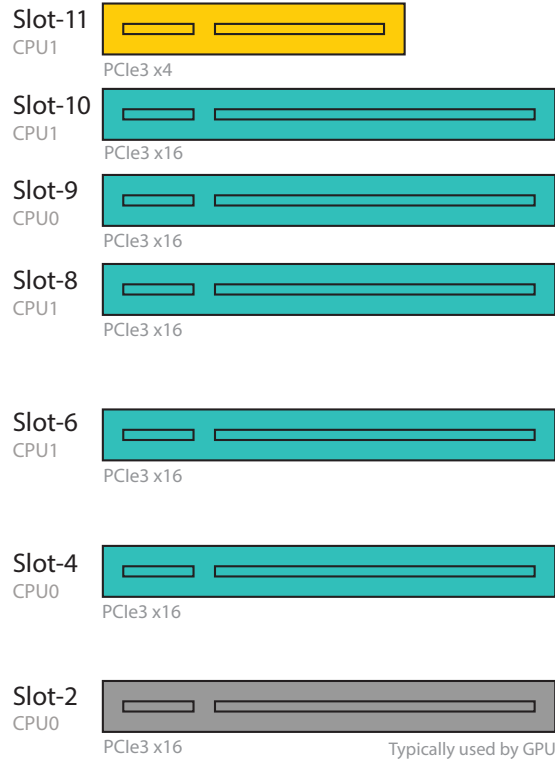

Incompatible ○ Can Not Use ● 4-lane PCIe Slot\* ● 8 or 16-lane PCIe Slot\*\* ●

For high-demand workflows such as 4K I/O or above, it is recommended that the AJA Video I/O card or device be on a separate PCIe bus from the media storage adapter.

AJA recommends BIOS 3.3 or later for the full support of all PCIe slots.

For maximum utilization of available PCIe slots when using a dual height GPU AJA recommends slot 2 for the GPU.

*\*4-lane PCIe slots can support the following AJA cards: KONA 1, KONA LHi, KONA LHe Plus*

*\*\*8-lane or 16-lane Computer PCIe slots can support the following AJA cards: KONA 5, KONA 4, KONA IP, KONA HDMI*

# Expansion Slot Placement for Supermicro SYS-7049GP-TRT / X11DPG